Samsung Secret

Product Information

Customer : **DATE : 25. Feb. 2011**

SAMSUNG TFT-LCD

MODEL : LTA400HL10

The Information Described in this Specification is Preliminary and can be changed without prior notice

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA400HL10	Doc. No	06-002-G-20110225	Page	1 / 28

Samsung Secret

Contents

Revision History

Date	Rev. No	Page	Summary
01. Dec. 2010	000	all	First issued
10.Jan 2011	001	all	Update TBD item
25.Feb 2011	002	Page 9 Page 18 Page 18 Page 19 Page 27	Update 3.1 TFT LCD Module part Update 5.1 Timing parameter Update 5.2 LVDS Input data characteristics Add 5.3 3D Mode sequence Add 9.2 (d) Storage condition of Packing

General Description

Samsung Secret

Description

LTA400HL10 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 55.0“ is 1920 x 1080 and this model can display up to 16.7 Million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV

Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with wide color gamut
- SPVA(Super Patterned Vertical Align) mode
- Wide viewing angle (±178°)
- High speed response (& Natural Motion (DFR: Double Frame Rate))
- FHD resolution (16:9)
- Low Power consumption
- Edge Type LED (Light Emitted Diode) BLU
- DE (Data Enable) mode
- 4ch LVDS (Low Voltage Differential Signaling) interface (4pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	921.7(W) X 536.3 (V) 29.5 (D)	mm	±1.0mm
Weight	9100 (Max)	G	
Pixel Pitch	0.461(H) x 0.461(W)	mm	
Active Display Area	885.6(H) X 498.15(V)	mm	
Surface Treatment	Antiglare, Hard-coating(3H)		
Display Colors	8 bit – 16.7 Million	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	400 (Typ.)	cd/m^2	

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	GND-0.5	13.2	V	(1)
Dimming Control	Max. Lum	-	5	V	
Storage temperature	T_{STG}	-20	60	℃	(2)
Operating temperature	T_{OPR}	0	50	℃	
Surface temperature	T_{SUR}	0	60	℃	(3)
Shock (non - operating)	X,Y,Z	-	50	G	(4)
Vibration (non - operating)	V_{NOP}	-	1.5	G	(5)

Note (1) Ta= 25 ± 2 °C
(2) Temperature and relative humidity range are shown in the figure below.
a. 90 % RH Max. (Ta ≤ 39 °C)
b. Relative Humidity is 90% or less. (Ta > 39 °C)
c. No condensation
(3) Although abnormal visual problems can be occurred in T_{SUR} range, the polarizer is not damaged in this range.
(4) 11ms, sine wave, one time for ±X, ±Y, ±Z axis
(5) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

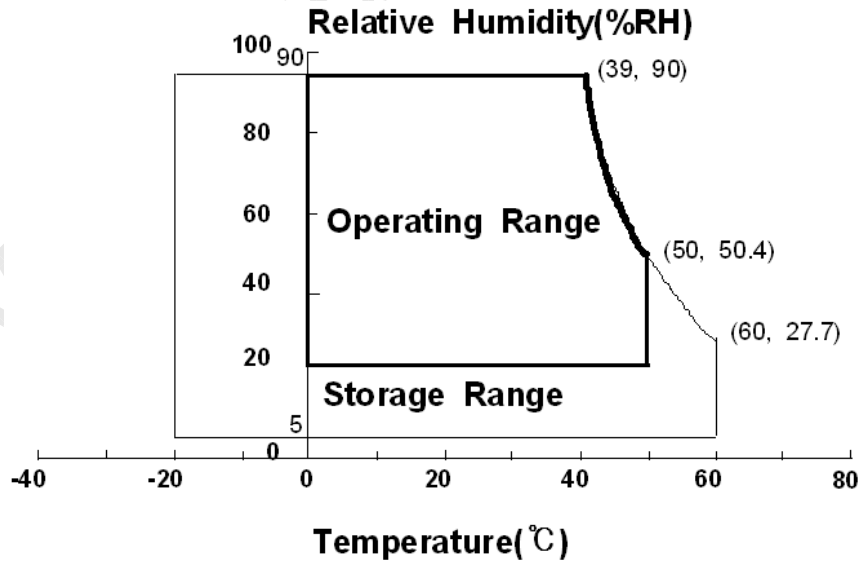

Fig. Temperature and Relative humidity range

2. Optical Characteristics

Samsung Secret

The optical characteristics should be measured in a dark room or equivalent.
Measuring equipment : TOPCON RD-80S, TOPCON SR-3, ELDIM EZ-Contrast

(Ta = 25 ± 2°C, VDD=12V, fv= 120Hz, f_{DCLK} = 297 MHz, LED Current = 150 mA)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		3,000	4,000	-		(1) SR-3
Response Time	G-to-G	Tg	Normal qL,R =0 qU,D =0 Viewing Angle	-	6	-	msec	(3) RD-80S
Luminance of White (Center of screen)		Y_L		TBD	400	-	cd/m²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	TBD	TYP. +0.03		(5),(6) SR-3
		Ry			TBD			
	Green	Gx			TBD			
		Gy			TBD			
	Blue	Bx			TBD			
		By			TBD			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	70	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	
Viewing Angle	Hor.	q_L	C/R≥10	75	89	-	Degree	(6) EZ-Contrast
		q_R		75	89	-		
	Ver.	q_U		75	89	-		
		q_D		75	89	-		
White Brightness Uniformity (9 Points)		B_{uni}		-	-	25	%	(2) SR-3

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 °C

Samsung Secret

Photo detector	Field
SR-3	2°
RD-80S	1°

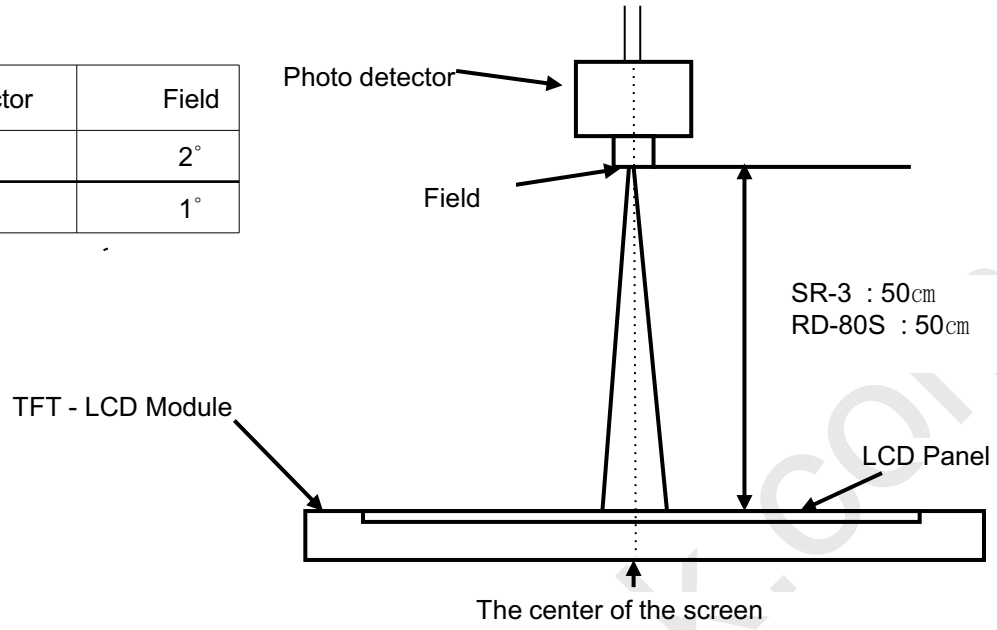

- Definition of test point

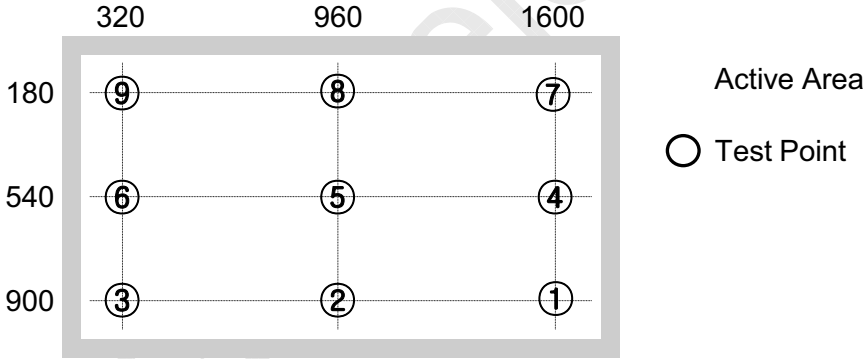

Note (1) Definition of Contrast Ratio (C/R)
: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G\max}{G\min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black

Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$Buni = 100 * \frac{(B\max - B\min)}{B\max}$$

Bmax : Maximum brightness
Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

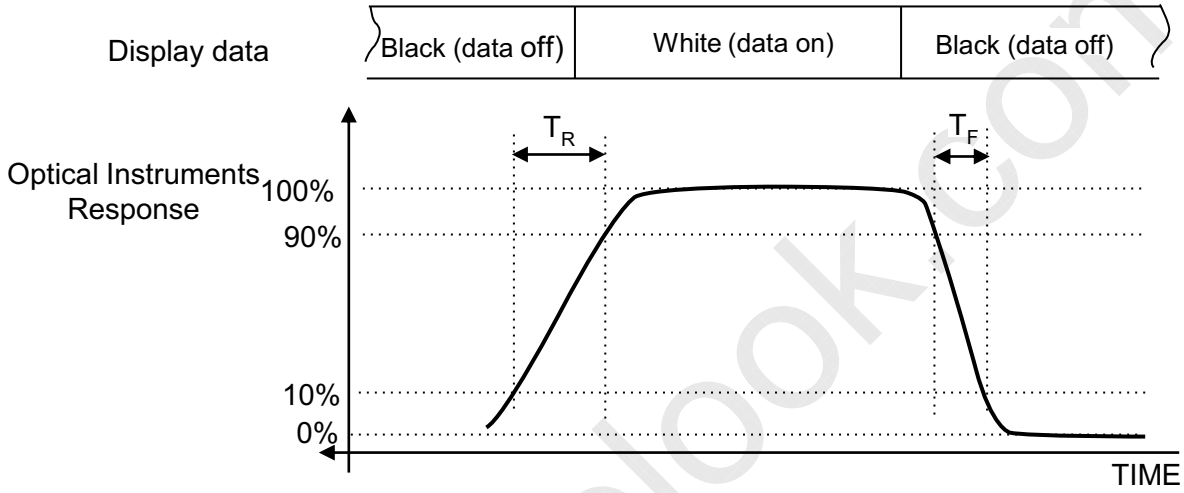

Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle
: Viewing angle range (C/R ≥10)

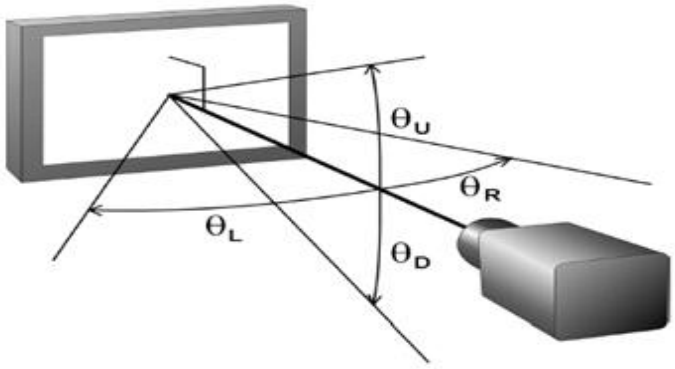

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

Ta = 25°C ± 2 °C

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	1080	1190	mA	(2),(3)
	(b) White		-	1110	1220	mA	
	(c) H-STRIPE		-	1790	1980	mA	
Power consumption (Control)		Pc	-	-	23.6	Watt	
Vsync Frequency		f_V	95	120.0	125	Hz	
Hsync Frequency		f_H	107	135.0	140	kHz	
Main Frequency		f_{DCLK}	259	297.0	330	MHz	
Rush Current		I_{RUSH}	-	6	8	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD}.
(2) fV=120Hz, fDCLK = 297.0MHz, V_{DD} = 12.0V, DC Current.
(3) Power dissipation check pattern (LCD Module only)

a) Black Pattern b) White Pattern c) H-STRIPE

(4) Measurement Conditions

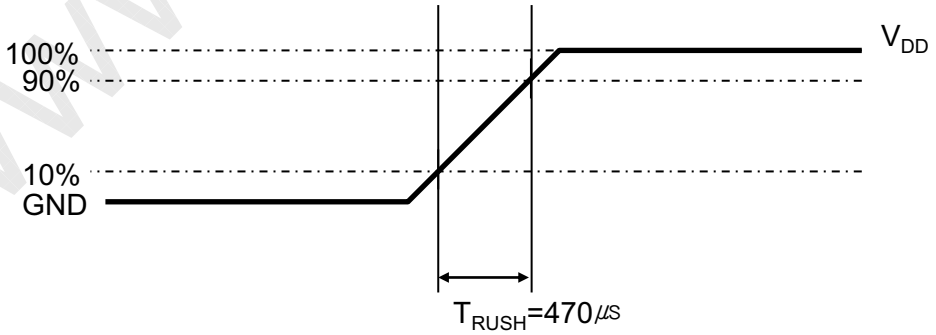

Rush Current I_{RUSH} can be measured when T_{RUSH}. is 470㎲.

3.2 Back Light Unit

The back light unit contains Edge type White LEDs (Light Emitting Diode)

Ta=25 ± 2°C

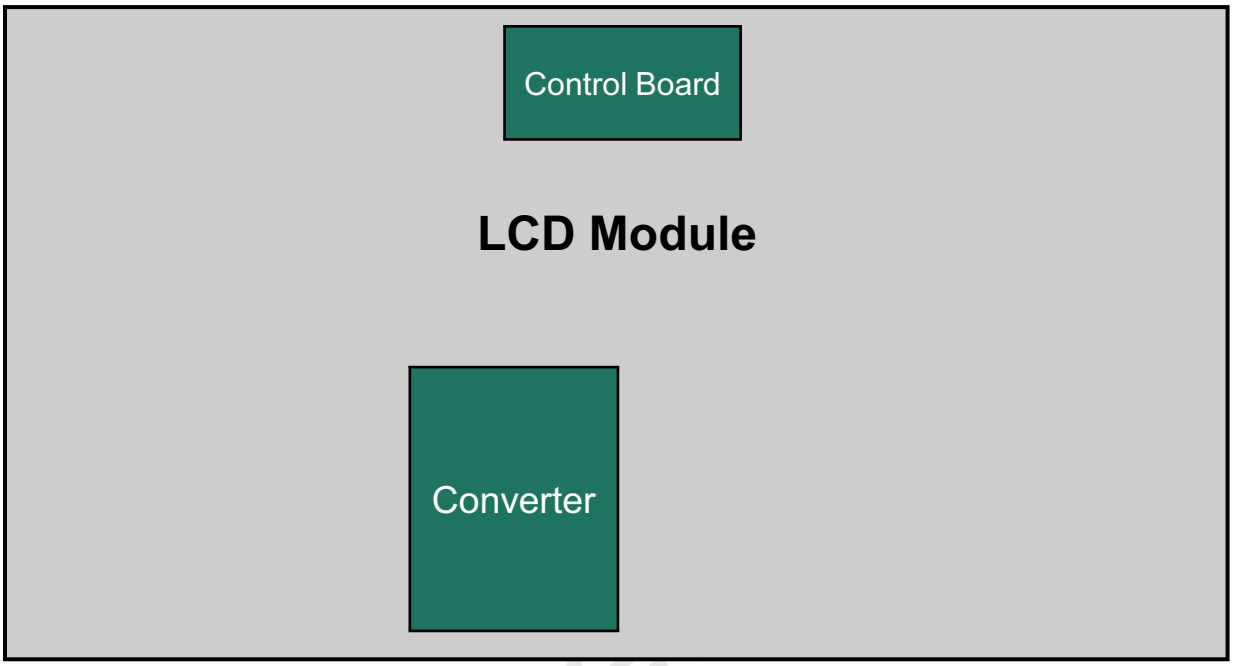

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25±2℃, For single lamp only.]

3.3 Inverter Input Condition & Specification

Samsung Secret

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	Vin	-	22	24	26	V	Ta=25±2 °C
Input Current	I_{RUSH}	Vin=24.0V Vdim =3.3V	-	-	7.0	A	Note (1)
Output Current	$I_{O\ (2D)}$	Vin = 24.0V V dim =3.3 V	142.5	150	157.5	mArms	
	$I_{O\ (3D)}$	Vin = 24.0V 3D Enable = On	228	240	252		
Backlight On/Off	ON	Vin=24.0 V	2.4	-	5.5	V	
	OFF	Vin=24.0 V	0	-	0.8		
Dimming Range	$V_{\_DIM}$	Vin :22~26V	0	-	3.3	V	Note(2)
Dimming Duty Output	D max	Vin=24V Dim:3.3V	100	-	-	%	
	D min	Vin=24V Dim:0V	-	1	-		
Dimming Frequency	F_{PWM}	Vin=24.0 V	140	150	160	Hz	
External Dimming Duty Range	EX_Dim	Vin=22.0~26.0 V Dim Pin(#13):floting	1	-	100	%	
External Dimming Frequency Range	F_{EX_PWM}		95	-	200	Hz	
External Dimming Signal Level	V_{PWM}	High (ON)	2.4	-	5.5	V	
		Low (Off)	0	-	0.8		

Note (1) All data is measured after 120min warm-up.
Note (2) V_Dim and Ex_Dim are available only at Normal 2D mode. (3D ENA = OFF)
Note (3) Duty = On / (On+Off) * 100

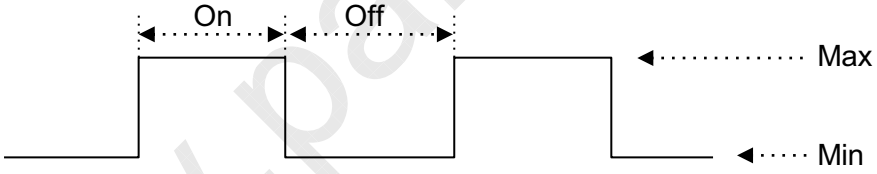

- Additional Appendix for Supply Current (Only for Reference_2D mode)

Items	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input Current	Iin _ overshoot	Vin = 24V, Dim=3.3V (Within 1hr at BLU on)	-	3.5	3.6	A
	Iin _ saturation	Vin = 24V, Dim=3.3V (After 1hr Aging)	-	2.82	2.9	A
Power Consumption (Back light)	P _ Inrush	Vin=24.0V, Vdim = 3.3V	-	-	168	Watt
	P _ overshoot	Vin = 24V, Dim=3.3V (Within 1hr at BLU on)	-	84	87	Watt
	P _ saturation	Vin = 24V, Dim=3.3V (After 1hr Aging)	-	68	70	Watt

4. Input Terminal Pin Assignment

Samsung Secret

4.1.1 Input Signal & Power

Connector : FI-RE41S-HF (JAE/UJU)

Pin	Description		Pin	Symbol	Description
1	Vdd(12V)		21	ODD LVDS SIGNAL	Rx1[3]P
2	Vdd(12V)		22		No Connection
3	Vdd(12V)		23		No Connection
4	Vdd(12V)		24		GND
5	Vdd(12V)		25		Rx3[0]N
6	No Connection		26		Rx3[0]P
7	GND		27		Rx3[1]N
8	GND		28		Rx3[1]P
9	GND		29		Rx3[2]N
10	ODD LVDS SIGNAL	Rx1[0]N	30		Rx3[2]P
11		Rx1[0]P	31		GND
12		Rx1[1]N	32		Rx3CLK-
13		Rx1[1]P	33		Rx3CLK+
14		Rx1[2]N	34		GND
15		Rx1[2]P	35		Rx3[3]N
16		GND	36		Rx3[3]P
17		Rx1CLK-	37		No Connection
18		Rx1CLK+	38		No Connection
19		GND	39	GND	
20		Rx1[3]N	40	No Connection	
			41	No Connection	

Note) No Connection : This PINS Should be disconnected because of SEC internal design.

4.1.2 Input Signal & Power

Connector : FI-RE51S-HF (JAE/UJU)

Pin	Description		Pin	Description	
1	Vdd(12V)		26	EVEN LVDS SIGNAL	Rx4[0]P
2	Vdd(12V)		27		Rx4[1]N
3	Vdd(12V)		28		Rx4[1]P
4	Vdd(12V)		29		Rx4[2]N
5	Vdd(12V)		30		Rx4[2]P
6	No Connection		31		GND
7	GND		32		Rx4CLK-
8	GND		33		Rx4CLK+
9	GND		34		GND
10	EVEN LVDS SIGNAL	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		No Connection
13		Rx2[1]P	38		No Connection
14		Rx2[2]N	39	GND	
15		Rx2[2]P	40	No Connection	
16		GND	41	No Connection	
17		Rx2CLK-	42	3D_EM	3D_EN signal (Note 2)
18		Rx2CLK+	43	No Connection	
19		GND	44	No Connection	
20		Rx2[3]N	45	No Connection	
21		Rx2[3]P	46	No Connection	
22		No Connection	47	No Connection	
23		No Connection	48	3D_SYNC_I	Shutter glass Sync Input signal (Note 2) (Note 3)
24		GND	49	3D_SYNC_O	Shutter glass Sync Signal
25		Rx4[0]N	50	No Connection	
			51	No Connection	

Note) No Connection : This PINS Should be disconnected because of SEC internal design.

Note (1) SEC internal Only: These PINS are used only for SAMSUNG. (DO NOT CONNECT)

Note (2) 3D Enable / 3D sync_I signal voltage level

High : Min 3V, Max 3.6 V Low : Min 0 V, Max 0.4V

Note3) Recommend timing for 3D_SYNC_I Signal .

- Guide Signal to Separate L frame and R frame
- Shutter glass signal & Operation timing also depend on this signal
- To operate 3D function, need this signal from Set A/D board.
  (In Order for using it in 2D mode, change the input condition into GND)

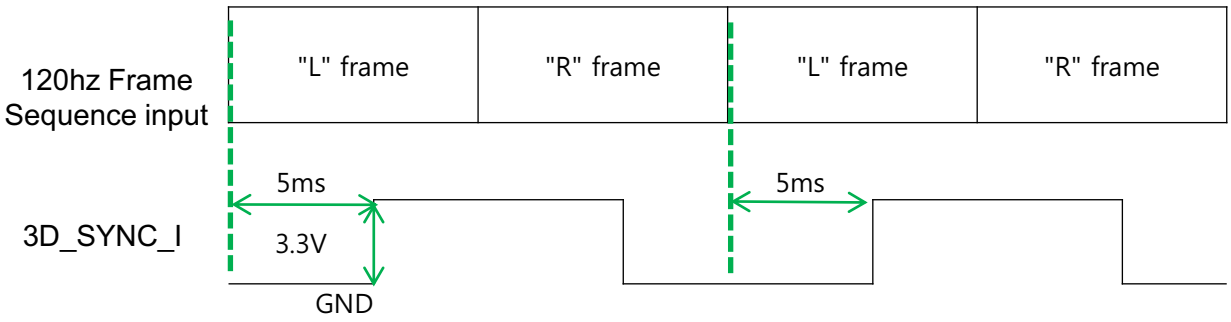

Note4) Pin number starts from Right side

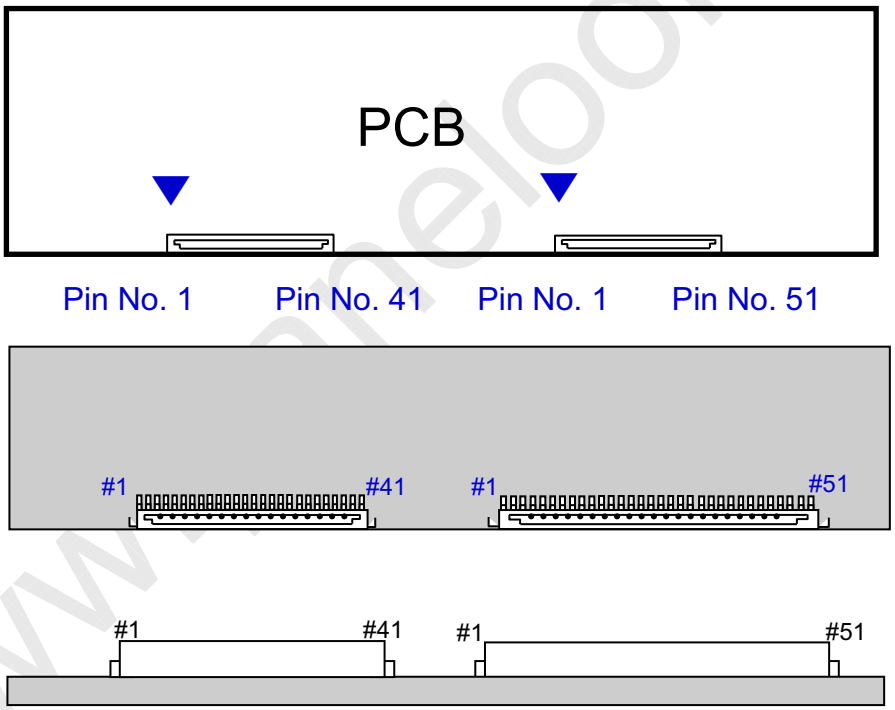

Fig. Connector diagram

a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
b. All power input pins should be connected together.
c. All NC pins should be separated from other signal or power.

4.2. Inverter Input Pin Configuration

Connector : Yeon-ho, 20022WR-14B1

Pin No.	Pin Configuration(FUNCTION)
	Master
1 ~5	24 V
6~10	GND
11	Error Out
12	Backlight On /Off [ON:2.4 – 5.5 V, OFF: 0 - 0.8 V]
13	Dimming Control [0V:Min, 3.3V:Max] *Note(1)
14	External PWM [1~100 %] *Note(1)

Note(1) If use Dimming Control, Pin 14 Must be N.C
If use External PWM, Pin 13 Must be N.C

4.3. Inverter Input Power Sequence

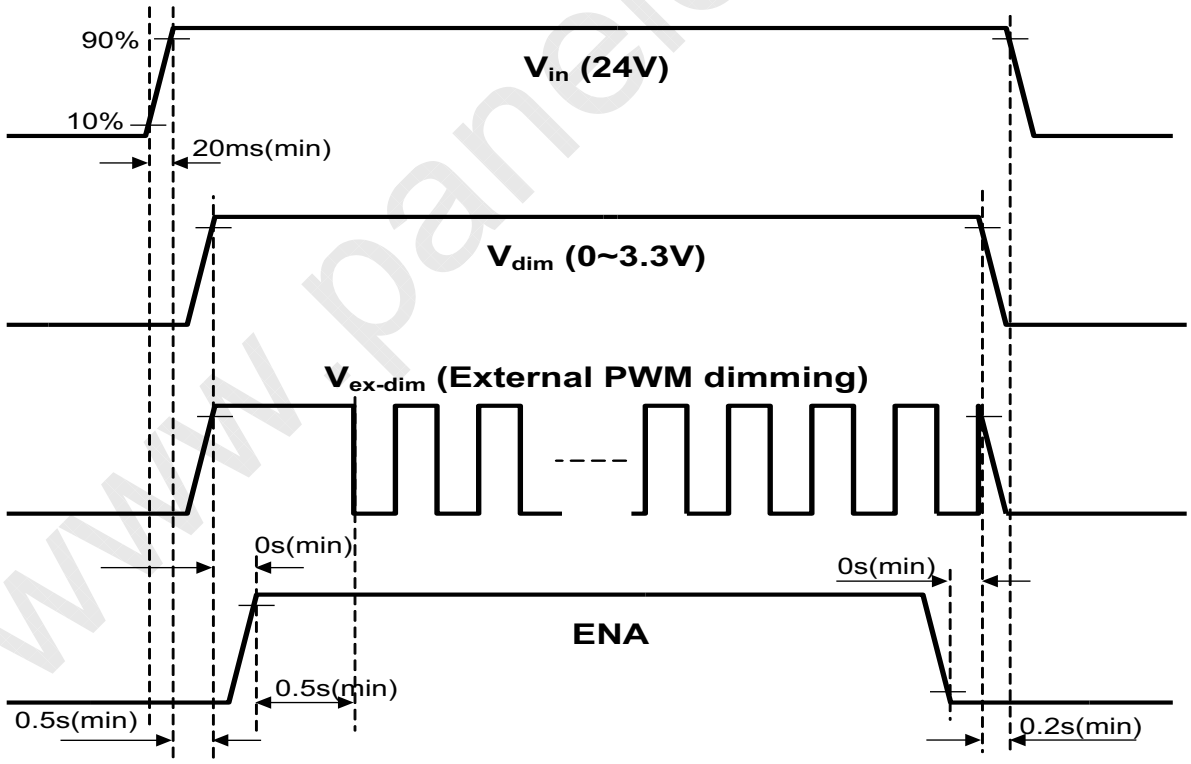

Note) SEQUENCE : ON = Vin(24V) > Dimming Control ≥ Backlight On/Off
OFF = Backlight On/Off ≥ Dimming Control > Vin(24V)

4.4 LVDS Interface

- LVDS Receiver : T-con (merged)
- Data Format (JEIDA Only)

Samsung Secret

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2
	TxIN/RxOUT1	R3
	TxIN/RxOUT2	R4
	TxIN/RxOUT3	R5
	TxIN/RxOUT4	R6
	TxIN/RxOUT6	R7
	TxIN/RxOUT7	G2
TxOUT/RxIN1	TxIN/RxOUT8	G3
	TxIN/RxOUT9	G4
	TxIN/RxOUT12	G5
	TxIN/RxOUT13	G6
	TxIN/RxOUT14	G7
	TxIN/RxOUT15	B2
	TxIN/RxOUT18	B3
TxOUT/RxIN2	TxIN/RxOUT19	B4
	TxIN/RxOUT20	B5
	TxIN/RxOUT21	B6
	TxIN/RxOUT22	B7
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0
	TxIN/RxOUT5	R1
	TxIN/RxOUT10	G0
	TxIN/RxOUT11	G1
	TxIN/RxOUT16	B0
	TxIN/RxOUT17	B1
	TxIN/RxOUT23	RESERVED

Samsung Secret

4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																								GRAY SCALE LEVEL
		RED								GREEN								BLUE								
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			R3~ R252
	↓ LIGHT	:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			
		1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			G3~ G252
	↓ LIGHT	:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			
		0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G253
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G254
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G255
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B2
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			B3~ B252
	↓ LIGHT	:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B253
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B254
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B255

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

5. Interface Timing

5.1 Timing Parameters (DE mode)

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	259	297.0	330	MHz	-
Hsync		F_H	107	135.0	140	KHz	-
Vsync		F_V	95	120.0	125	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
	Vertical Total	T_V	1091	1125	1380	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
	Horizontal Total	T_H	2112	2200	2352	clocks	-

Note) This product is DE mode. But the Hsync & Vsync signal must be inputted

(1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
(2) Internal VDD = 3.3V
(3) Spread spectrum
- Modulation rate (max) : ± 1.5 %
- Modulation Frequency : under 100KHz

5.2 LVDS Input Data Characteristics

ITEM		SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
Input Data Position	F_{IN}=78MHz	t_{RSRM}	-	-	500	ps	
		t_{RSLM}	-500	-	-	ps	
Input common mode voltage		V_{CM}	0.55	-	1.8	V	-
Differential Input Voltage		$\|V_{ID}\|$	100	-	-	mV	-

Note) When the skew is measured the Spread Spectrum should be 0%

5.3 3D mode Sequence

5.3.1 3D Sequence

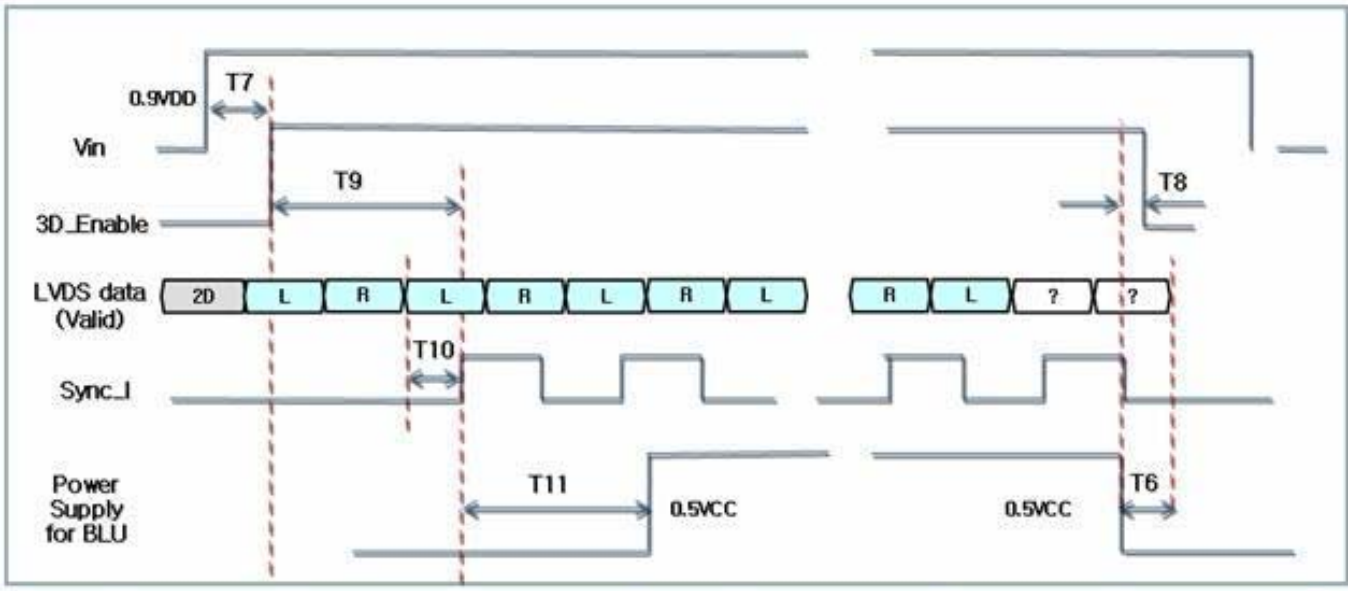

	Spec	Measured	Result		Spec	Measured	Result
T5	≥ 1000 msec			T8	> 0 msec		
T6	≥ 100 msec			T9	> 0 msec		
T7	≥ 2 sec			T10	Typ. 5msec		

※ T10 : Sync_I is checked with Valid Active L frame

5.3.2 Level of 3D Control signal

Test Items	Test Condition		Spec	
			Min	Max
3D Enable Level	C-PBA Input Level (Change to 3D mode)	High	2.7	3.3
		Low	0.0	0.4
3D_SYNC_I	C-PBA Input Level (L/R Sync)	High	2.7	3.3
		Low	0.0	0.4
3D_SYNC_O	Shutter Glasses Sync Level	High	2.7	3.3
		Low	0.0	0.4

5. 4 Timing diagrams of interface signal (DE mode)

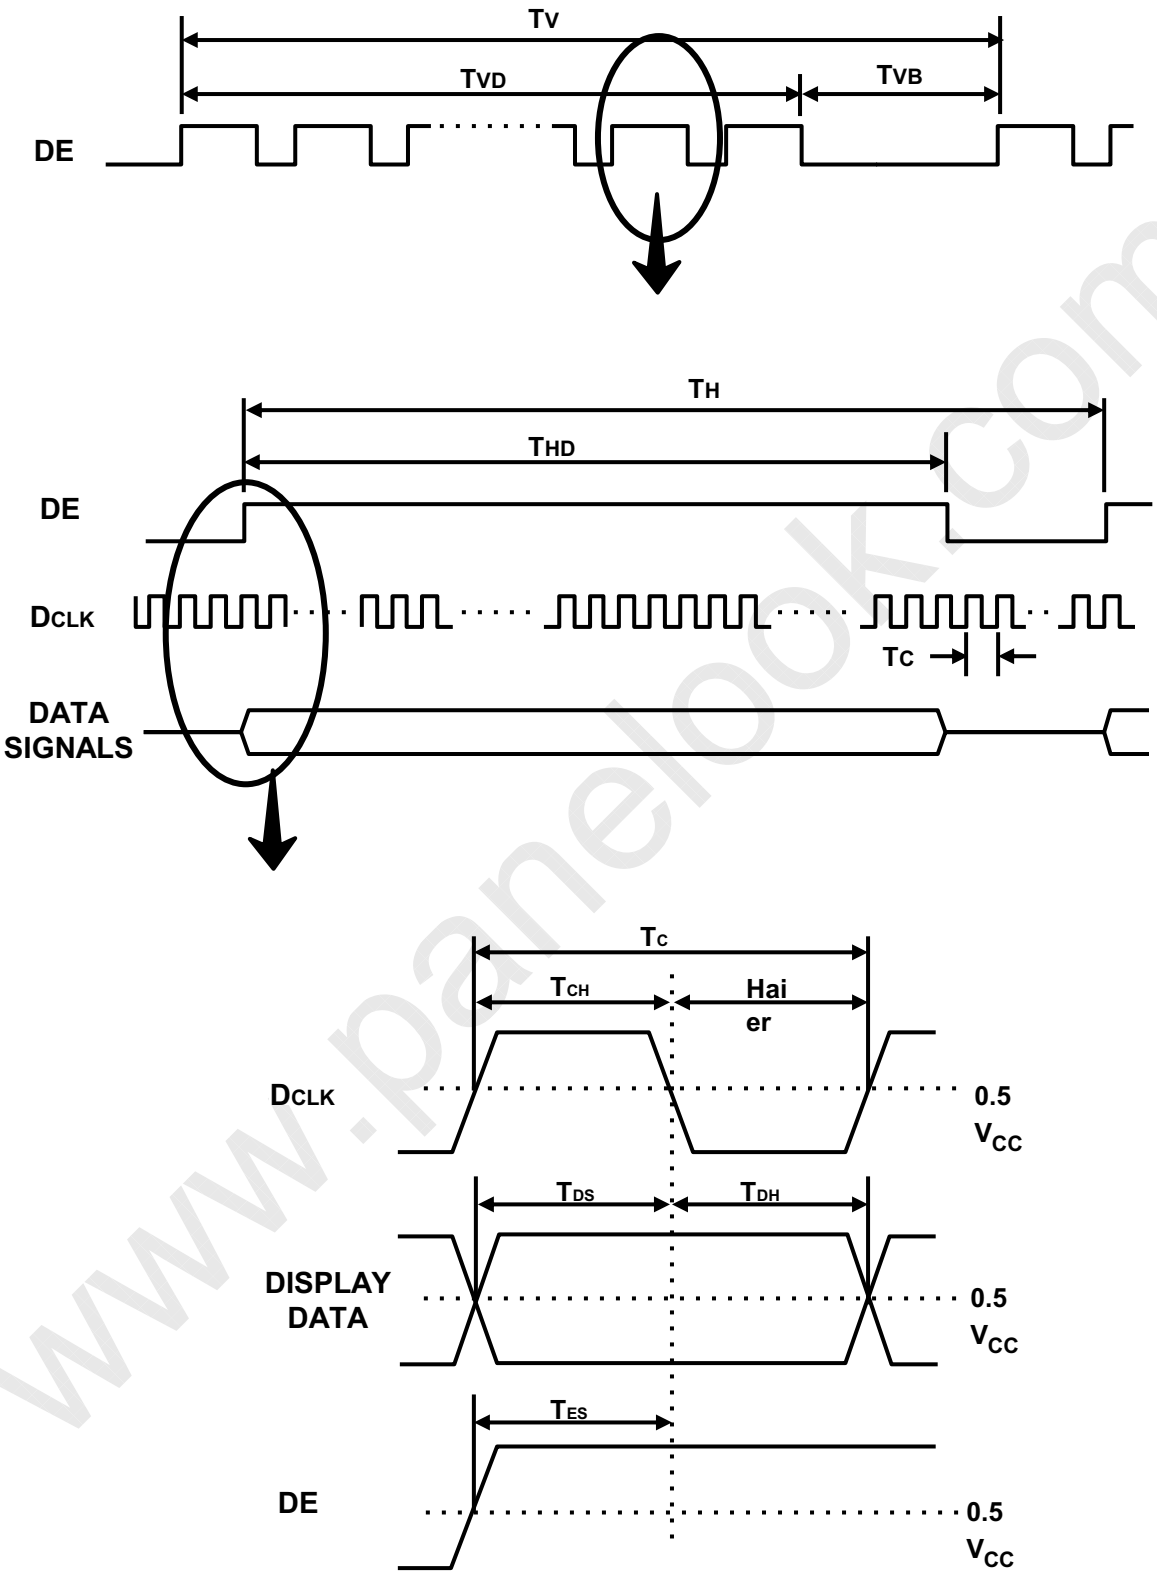

5.5 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

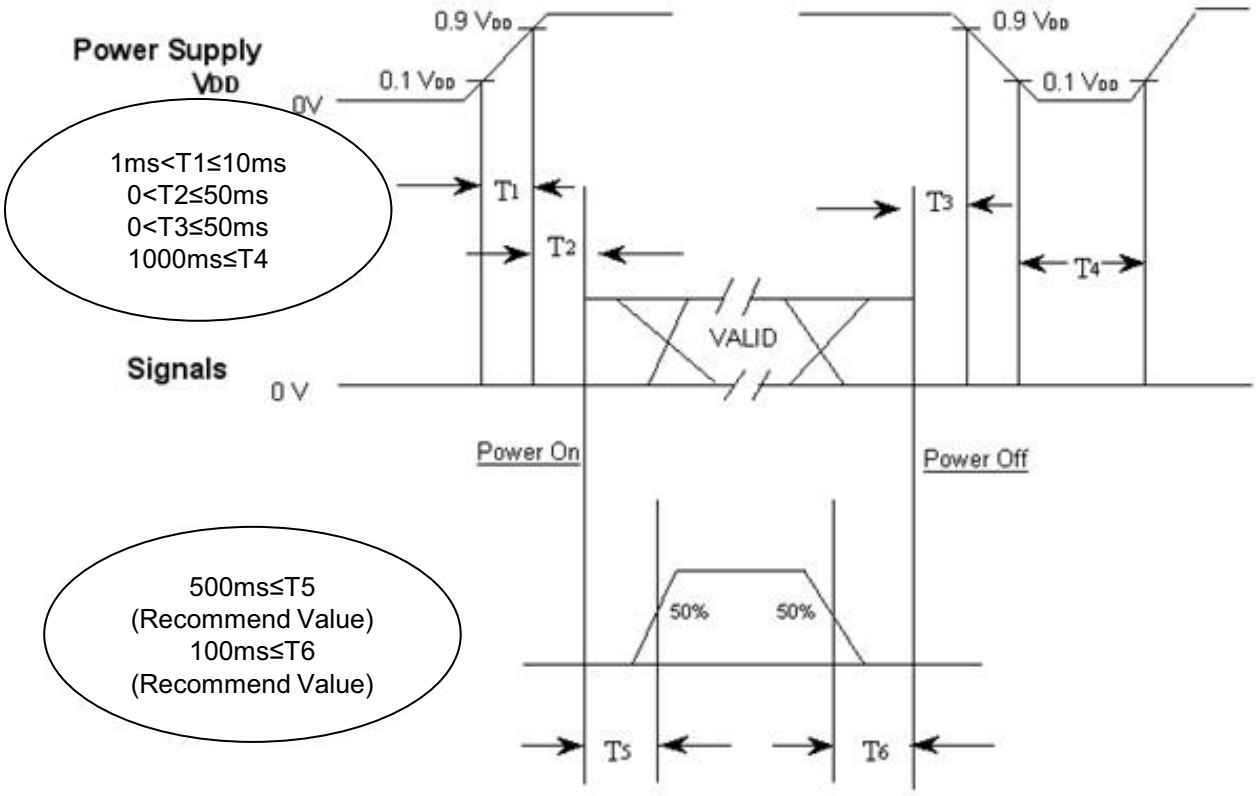

T1 : V_{DD} rising time from 10% to 90%
T2 : The time from V_{DD} to valid data at power ON.
T3 : The time from valid data off to V_{DD} off at power Off.
T4 : V_{DD} off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.
- In Case T5 is less than 1000msec and T6 is less than 100msec, Garbage Display can be seen. (It is not related to electrical function issue, Just for recommendation to prevent Garbage Display)

6. Outline Dimension- Front

TBD

Samsung Secret

6. Outline Dimension- Rear

TBD

7. PACKING

7.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

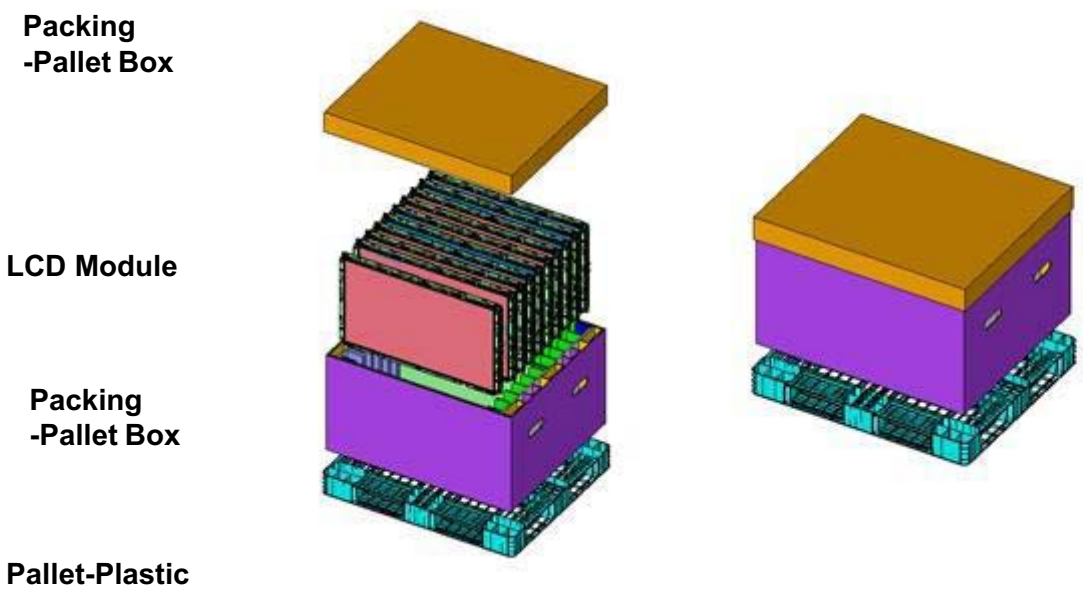

7.2 Packing Specification

Item	Specification	Remark
LCD Packing	23 ea / (Packing-Pallet Box)	1. 8.6 kg / LCD (ea) 2. 14 kg / Packing Set 3. Packing Material : Paper
Pallet	1Box / Pallet	1. Pallet weight = 5.3 kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1150mm(H) x 985mm(V) x 711mm(height)
Total Pallet Weight	200.74 kg	Module (180.6 kg) + Packing SET (TBD kg)

8. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Part number : LTA400HL10
(2) Revision: Three letters
(3) Lot number : X X X X XXX XX X

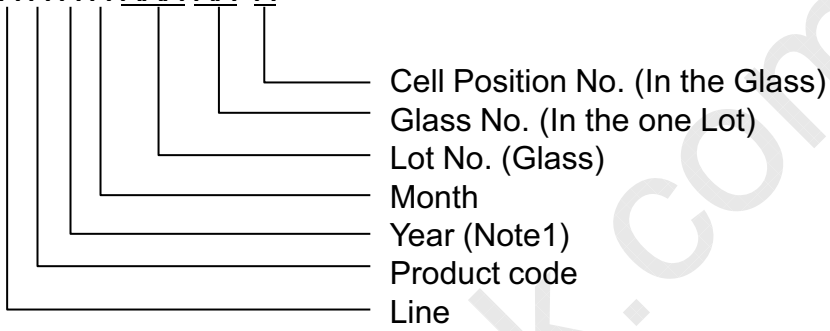

(4) Nameplate Indication

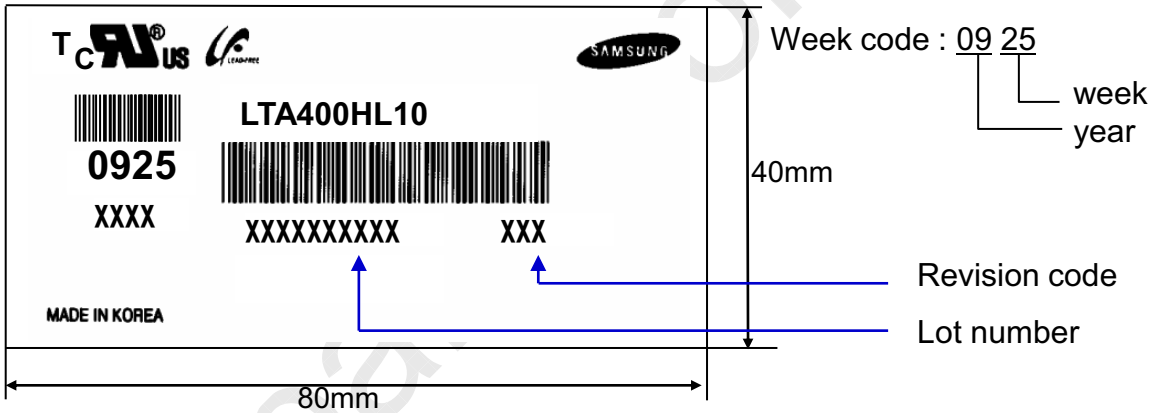

(5) Packing box attach

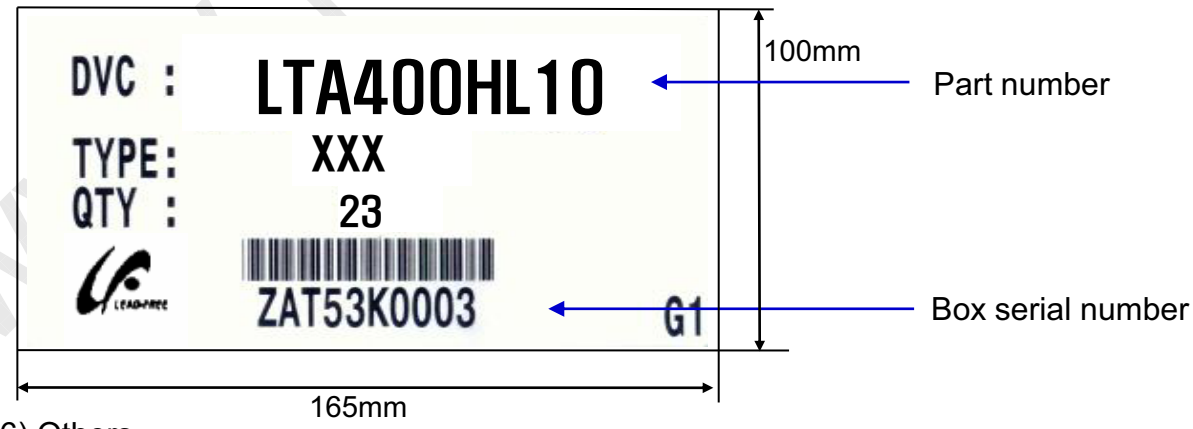

(6) Others

1. After service part
   Lamps cannot be replaced because of the narrow bezel structure.

9. General Precautions

9.1 Handling

(a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.

(b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.

(c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.

(d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.

(e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.

(f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.

(g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.

(i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.

(j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(k) Do not disassemble the Module.

(l) Do not disassemble shield case of inverter & LVDS board

(m) Do not connect N.C pins. (Samsung internal use only)

(n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module

(o) Pins of I/F connector should not be touched directly with bare hands.

9.2 Storage

(a) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 5 to 40 C and relative humidity of less than 70%.
(b) Do not store the TFT-LCD module in direct sunlight.
(c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.
(d) Storage condition of Packing

ITEM	UNIT	Min.	Max.
Storage Temperature	(℃)	5	40
Storage Humidity	(%rH)	35	75
Storage Life	12 months		
Storage Condition	-Prohibit direct sunlight -Ventilation in storehouse and control changing temperature is within limits of environment -Put it on pallet and store them with removing from wall. -Don't wet Out-BOX and avoid rain. -Without condensation. -Etc. Avoid harmful Condition		
Long-term Storage Process	-More than 3 months Storage or Low temp. Delivery/under 5℃storage →On the 20℃,50%rH Condition, more than 10hr release.		

9.3 Operation

(a) Do not connect or disconnect the Module in the "Power On" condition.

(b) Power supply should always be turned on/off by the "Power on/off sequence"

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

(d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

9.4 Operation Condition Guide

(a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
- Temperature : 20±15℃
- Humidity : 55±20%
- Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc.., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

9.5 Others

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.

(c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.

(d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.

(e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

(f) Please contact SEC in advance when you display the same pattern for a long time.